Test Report: NTS-1200-248

1200W High Reliable True Sine Wave Power Inverter

- DESIGN VERIFY TEST

  Output Function Test

  Input Function Test

  Protection Function Test

  Control Function Test

  APPLICATION Test

  Component Stress Test

- SAFETY & E.M.C. TEST

  Safety Test

  E.M.C. Test

- RELIABILITY TEST

  ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RATED POWER	1200W	IP: 48VDC Ta:25℃	1224 W
2	MAXIMUM OUTPUT POWER (TYP)	(1)1380W/180sec. (2)1800w/10sec (3)SURGE POWER 2000W FOR 30CYCLE Vin (30 ± 5 CYCLE)	IP: 50VDC OP:TESTING LOAD Ta:25℃	(1) 228.8V/ 5.81 A/ 180.12 Sec (2) 228.6V/ 7.76 A/ 10.10 Sec (3) 225.6V/ 8.56 A/ 28 Cycle
	CH3:O/P VAC CH4:O/P IAC Fig1 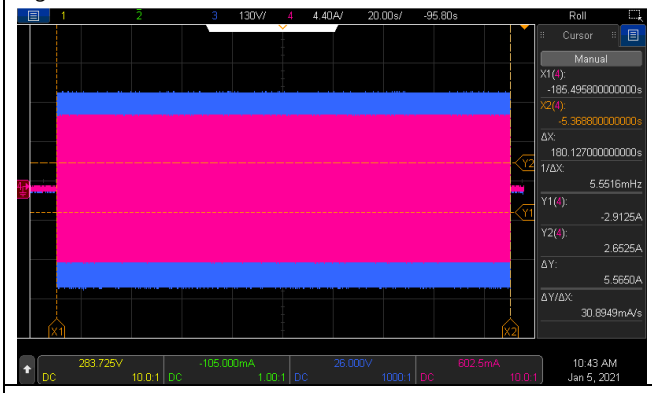 Fig2 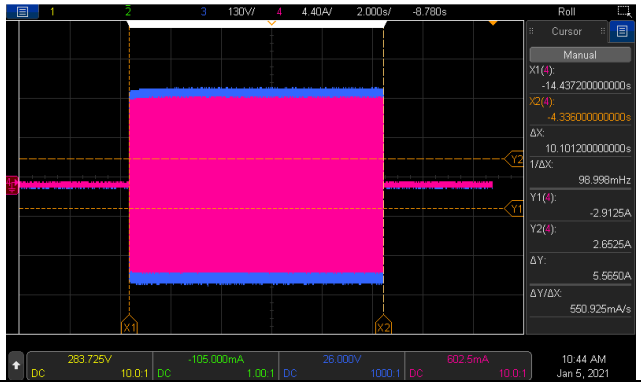 Fig3 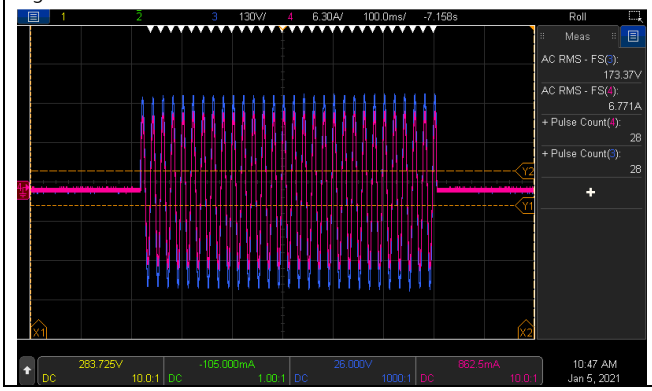			
3	AC Voltage	200 / 220 / 230 / 240Vac selectable by DIP S.W	IP: 48VDC OP: FULL LOAD Ta:25℃	DIP S.W 200VAC: 199.28 V DIP S.W 220VAC: 219.86 V DIP S.W 230VAC: 229.02 V DIP S.W 240VAC: 238.92 V
4	FREQUENCY	50/60Hz (±0.1HZ) selectable by DIP S.W	IP: 48VDC OP: FULL LOAD Ta:25℃	DIP S.W 50HZ: 50.041 HZ DIP S.W 60HZ: 59.959 HZ

5	WAVEFORM	True sine wave (THD<3%)	IP: 50VDC OP:75% LOAD(900W) (1) Vo(min) (2) Vo(nor) (3) Vo(max) Ta:25℃	(1) 1.45% / Vo(min)/75% LOAD (2) 1.42% / Vo(nor) /75% LOAD (3) 1.41% / Vo(max) /75% LOAD

CH3:O/P VAC CH4:O/P IAC

Fig1

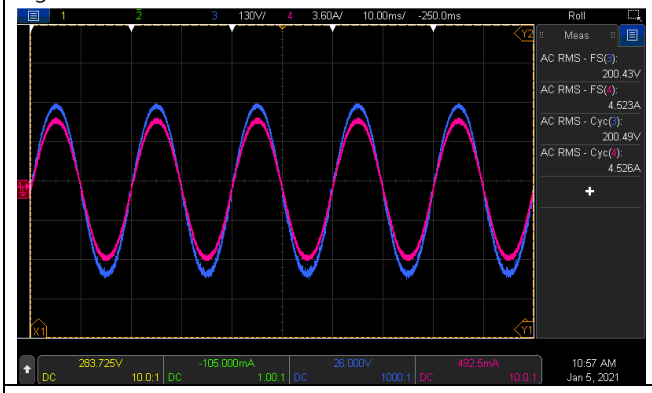

Fig2

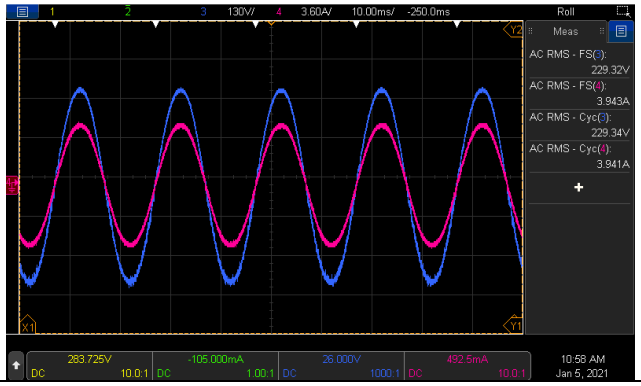

Fig3

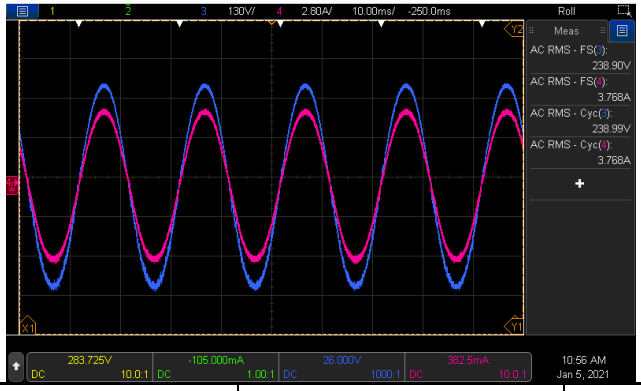

6	AC REGULATION	±3%	IP: 50VDC OP:75% LOAD(900W) Ta:25℃	-0.33 %
7	Overshoot /Undershoot	<±10%	IP: 48VDC OP: (1) full load turn on (2) no load turn on (3) full /no load change Ta:25℃	(1) -7.3 % (2) -6.52 % (3) -4.52 %
8	O/P voltage DC offset	Vin(nor)= 48 v · Vo< 200mV · no load : 76.7 mV / full load: 86.8 mV		

9	LED STATUS	● Statas test

LED	Statas	RESULT
Green	Inverter OK	OK
Orange	Remote off Saving mode	OK
Red	Abnormal Status (See SPEC)	OK

● Battery test

LED	Battery RANGE	RESULT
Green	50.0~62.0 Vdc±1v	50.33Vdc ~ 62.22 Vdc
Orange	44.0~50.0Vdc ±1v	44.25Vdc ~ 50.31Vdc
Red	<44.0 Vdc ±1v > 62.0vdc±1v	< 44.17Vdc > 62.36 Vdc

● Load test

LED	LOAD RANGE	RESULT
Green	Min. load ~ 40%±5% LOAD	Min. load ~ 40.58%
Orange	40%±5% ~ 80%±5% LOAD	40.67% ~ 79.42%
Red	≧ 80%±5% LOAD	≧ 79.58 %

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	VOLTAGE RANGE (TYP)	40VDC~66VDC	IP: TESTING OP:NO LOAD/FULL LOAD Ta:25℃	40.32 VDC~ 66.23 VDC/NO LOAD 40.31 VDC~ 66.18 VDC/FULL LOAD
			I/P: LOW-LINE=42V HIGH-LINE=65V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON:30Sec OFF:30Sec 10MIN (POWER ON/OFF NO DAMAGE) I/P: 48V O/P:FULL LOAD ON:30ec OFF:30ec 12Hr (POWER ON/OFF NO DAMAGE)	Test: OK

2	DC CURRENT (TYP)	30A	IP: 48VDC OP:FULL LOAD Ta:25℃	27.16 A
3	NO LOAD DISSPATION (Typ.)	NON-Saving Mode=25W	IP: 48VDC OP:NO LOAD Ta:25℃	21.13 W
		SAVING MODE (1) Po： Default disable, auto detect AC output load ≦ 10W will be changed to saving mode (2) Pi ： ≦1.5 W	IP: 48VDC OP: TESTING LOAD Ta:25℃	NORMAL TO SAVING MODE: ≦ 11 W
			IP: 48VDC OP: TESTING LOAD Ta:25℃	1.43 W
4	OFF MODE CURRENT DRAW (Typ.)	≦ 1mA	IP: 48VDC OP: Sw off Ta:25℃	0.81 mA
5	EFFICIENCY(TYP)	900W/93%	IP: 50VDC OP: Po=900W 230V/50HZ Ta:25℃	93.7 %

PROTECTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BAT LOW ALARM	44V±1VDC	IP: TESTING OP:FULL LOAD SW:ON Ta:25℃	44.108 V
2	BAT LOW SHUT DOWN	40V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	40.277 V
3	BAT LOW RESTART	50V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	50.258 V
4	BAT HIGH ALARM	62V±1VDC	IP: TESTING OP:FULL LOAD SW:ON Ta:25℃	62.33 V
5	BAT HIGH SHUT DOWN	66V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	66.3 V
6	BAT HIGH RESTART	60V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	60.32 V

7	OVER TEMPERATURE	Shut down o/p voltage: re-power on	IP: HI LINE/LOW-LINE OP: FULL LOAD SW:ON Ta:25℃	Shut down o/p voltage, re-power on to recover LED DISPLAY: OK
8	OUTPUT SHORT	Shut down o/p voltage: re-power on	IP: 48VDC O/P: FULL LOAD SW:ON Ta:25℃	Shut down o/p voltage, re-power on to recover LED DISPLAY: OK (1).TEST: OK
9	OVER LOAD (typ.)	105%~115%LOAD 180sec 115%~150%LOAD 10 sec Shut down o/p voltage, re-power on to recover	IP: 48VDC OP: TESTING SW:ON Ta:25℃	(1). 104.7 %~113.7 % 180.12 sec (2). 114.9%~ 147.7 % 10.10 sec Shut down o/p voltage, re-power on to recover

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	REMOTE CONTROL	(1).Power ON-OFF remote control by front panel dry contact connector (by RELAY) Open : Normal work Short : Remote off (2). IRC3	IP: 48VDC OP: FULL LOAD Ta:25℃	Open : Normal work Short : Remote off (1).TEST: OK (2).TEST: OK

APPLICATION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	LAMP	LAMP: 619 W · turn on OK LAMP: 1235 W · turn on OK LAMP: 1432 W · turn on OK	1. Vin=HIGH LINE 2. O/P=110V/60Hz TEST: OK	
2	INDUCTION MOTOR	0.5 HP	1. Vin=HIGH LINE 2. O/P=110V/60Hz TEST: OK	
3	SWITCHING POWER SUPPLY	WITH PFC: RSP-1600-48 · O/P= 1189 W	1. Vin=HIGH LINE 2. O/P=110V/60Hz TEST: OK	
		NO PFC: SE-1000-48 · O/P= 457 W	1. Vin=HIGH LINE 2. O/P=110V/60Hz TEST: OK	

COMPONENT WEAFORM TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC TO DC Power Transistor (D to S) or (C to E) Peak Voltage	Q101/ Q105 Rated : 200V /65 A	I/P: high line O/P:V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	Q101 Q105 (1) 161V (1)165V (2) 163V (2)163V (3) 161V (3)163V (4) 165V (4)170V (5) 165V (5)165V
2	DC TO DC Diode Peak Voltage	D 151 Rated :600V/ 20A	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	D151 D152 (1) 538V （1）534V (2) 587V （2）546V (3) 583V (3) 546V (4) 579V (4) 555V (5) 563V (5) 546V
3	DC BUS Capacitor Voltage	C161/C162 Rated : 680 u/ 315 V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	C161 C162 (1) 257V (1) 265V (2) 261V (2) 269V (3) 261V (3) 273V (4) 269V (4) 269V (5) 257V (5) 265V
4	DC TO AC Power Transistor (D to S) or (C to E) Peak Voltage	Q 1 Rated : 30A / 650 V	I/P: high line O/P:V(min)/Freq 50HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	Q1 Q3 (1)555V (1)534V (2)571V (2) 571V (3)555V (3) 542V (4)555V (4) 555V (5)551V (5) 555V
5	AUX PWM MOS	Q201 Rated : 65 A/ 200 V Q501 Rated : 65 A/ 200 V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	Q201 Q501 (1) 170V (1) 49.0V (2) 170V (2) 49.0V (3) 170V (3) 49.0V (4) 170V (4) 49.0V (5) 170V (5) 49.0V
6	Control IC Voltage Test	MCU IC U301 Rated 2.4 V~ 3.6 V AUX IC U201 Rated	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On	U301 U501 (1) 3.41V (1) 12.36V (2) 3.37V (2) 12.36V (3) 3.41V (3) 12.36V (4) 3.41V (4) 12.36V

		8.2V~30V CHARGE IC U501 Rated -0.3V~20V Gate Driver IC U81 Rated -0.3V~20V	(4) NO LOAD Turn On (5) Saving mode Ta:25℃	(5) 3.37V U201 (1) 12.12V (2) 12.12V (3) 12.12V (4) 12.12V (5) 12.12V	(5) 12.36V U81 (1) 5.06V (2) 5.06V (3) 5.06V (4) 5.06V (5) 5.06V

SAFETY &EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	BAT I/P-AC O/P: 3 KVAC/min AC O/P-FG: 1.5 KVAC/min	BAT I/P-AC O/P: 3.6 KVAC/min AC O/P-FG:1.8 KVAC/min Ta:25℃	BAT I/P-AC O/P: 7.17 mA AC O/P-FG: 6.09 mA NO DAMAGE
2	GROUNDING CONTINUITY	IEC62368 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25℃	3mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	▓ EN55032 CISPR32 (exppect for Type-UN) CLASS A	I/P:48 VDC O/P: :FULL/50% LOAD Ta:25℃	CLASS A
2	E.S.D	EN61000-4-2 AIR：8KV / Contact：4KV	I/P: 48VDC O/P:FULL LOAD Ta:25℃	■ CRITERIA A □ CRITERIA B
3	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL：NTU-1200-248 1. ROOM AMBIENT BURN-IN：2 HRS I/P： 50VDC O/P： FULL LOAD Ta= 25.0 ℃ 2. HIGH AMBIENT BURN-IN： 2 HRS I/P： 50VDC O/P： FULL LOAD Ta= 35.0 ℃		
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P： 50VDC O/P： 100%LOAD Ta= -25 ℃	TEST：OK

NO	Position	ROOM AMBIENT Ta=25.0 ℃	HIGH AMBIENT Ta= 35.0 ℃
1	C101	61.5℃	67.5℃
2	Q108	70.9℃	78.5℃
3	RTH6	62.7℃	70.6℃
4	Q101	61.0℃	70.7℃
5	T501	35.9℃	46.3℃
6	C531	34.1℃	43.8℃
7	Q501	37.2℃	47.6℃
8	Q141	36.9℃	47.6℃
9	T101	79.5℃	86.2℃
10	LF1	34.0℃	42.6℃
12	CT1	31.0℃	40.2℃
13	C161	48.4℃	56.6℃
14	Q1	70.9℃	81.8℃
15	RY1	38.7℃	46.8℃
16	C2	31.5℃	41.6℃
17	Q2	70.3℃	81.1℃
18	D151	70.7℃	77.4℃
19	T202	31.9℃	46.6℃
20	Q201	32.7℃	43.7℃
21	L10	63.8℃	72.4℃
22	R223	49.6℃	60.2℃
23	C222	40.2℃	50.7℃
24	D152	66.4℃	73.4℃
25	TSW1	61.6℃	72.3℃
26	R213	34.9℃	45.1℃
27	U201	40.5℃	50.4℃
28	Q203	41.3℃	51.5℃
29	U81	46.4℃	57.0℃
30	R501	39.3℃	50.0℃
31	U501	37.7℃	48.2℃
32	D501	37.9℃	49.0℃
33	R24	82.0℃	93.4℃
34	U301	44.1℃	54.4℃
35	U361	49.2℃	58.7℃
36	TC1	43.6℃	52.7℃
37	TC2	41.4℃	50.2℃
38	C104	69.1℃	76.0℃
39	Q361	40.8℃	49.4℃

3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 35 ℃ NO DAMAGE	I/P：65VDC O/P：FULL LOAD Ta= 35 ℃ HUMIDITY= 95 %R.H	TEST：OK
4	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature： -45℃~ +90℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：5 CYCLE 5. Input/Output condition： STATIC		TEST：OK
5	THERMAL SHOCK TEST	1. Thermal shock Temperature： -25℃~ +40℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：10 CYCLE 5. Input/Output condition： 50VDC/Full Load		TEST：OK
6	VIBRATION TEST	1 Carton & 1 Set (1) Waveform： Sine Wave (2) Frequency：10~500Hz (3) Sweep Time：10min/sweep cycle (4) Acceleration：4G (5) Test Time：60min in each axis (X.Y.Z) (6) Ta：25℃		TEST：OK
7	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P： 50VDC O/P：FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P： 50VDC O/P：FULL LOAD Ta= 35 ℃ LIFE TIME		(1) 290924.7HRS (2) 191938.7HRS
8	MTBF	Conducted by Parts Stress Analysis Prediction 596.7K hrs min. Telcordia TR/SR-332 (Bellcore) ; 62.0K hrs min. MIL-HDBK-217F (25℃)		
9	Ongoing Reliability Test	I/P：50VDC O/P：80% LOAD TA=50℃ Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

2018.4.30 GP-A50-F010