Test Report: NTS-300-248

300W High Reliable Built-in Type True Sine Wave DC-AC Power Inverter

- DESIGN VERIFY TEST

  Output Function Test

  Input Function Test

  Protection Function Test

  Control Function Test

  APPLICATION Test

  Component Stress Test

- SAFETY & E.M.C. TEST

  Safety Test

  E.M.C. Test

- RELIABILITY TEST

  ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RATED POWER	300W	IP: 48VDC Ta:25℃	307.05 W
2	MAXIMUM OUTPUT POWER (TYP)	(1) 345W/180sec. (2) 450W/10sec (3)SURGE POWER 600W FOR 30CYCLE Vin (30±5 CYCLE)	IP: 50VDC OP:TESTING LOAD Ta:25℃	(1) 228.8 V/ 1.48A/ 180.08 Sec (2) 228.3V/ 1.91 A/ 10.07 Sec (3) 231.0 V/ 2.44 A/ 28 Cycle
	CH3:O/P VAC CH4:O/P IAC Fig1 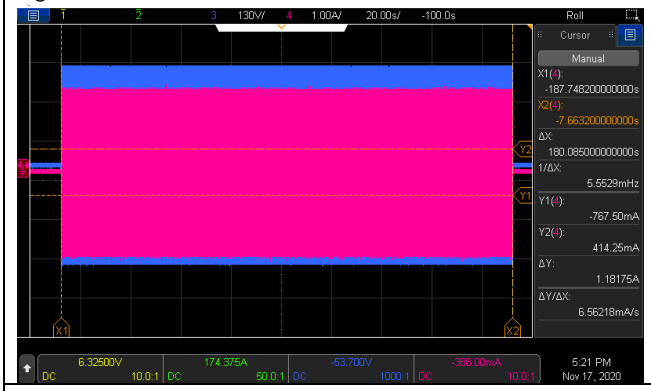 Fig2 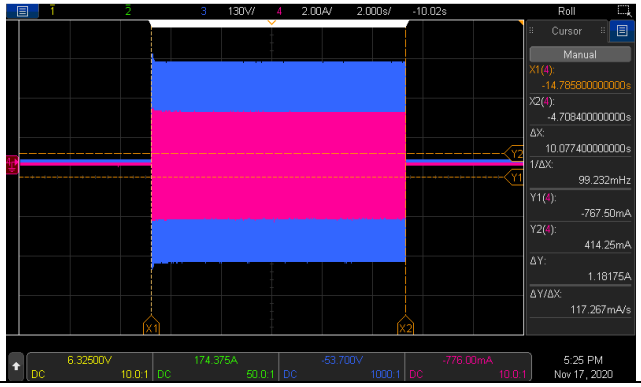 Fig3 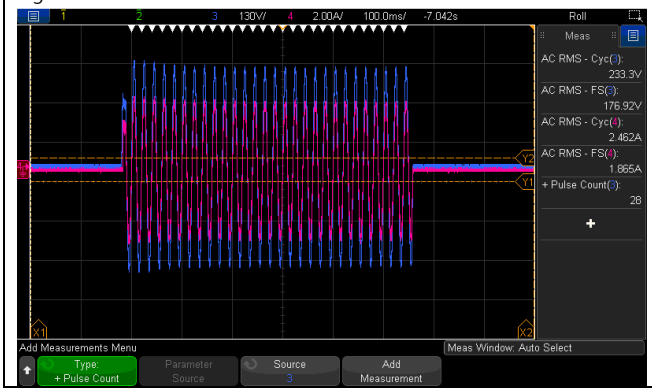 Fig4			
3	AC Voltage	200 / 220 / 230 / 240Vac selectable by DIP S.W	IP: 48VDC OP: FULL LOAD Ta:25℃	DIP S.W 200VAC: 198.9 V DIP S.W 220VAC: 218.9 V DIP S.W 230VAC: 228.9 V DIP S.W 240VAC: 239.0 V
4	FREQUENCY	50/60Hz (±0.1HZ) selectable by DIP S.W	IP: 48VDC OP: FULL LOAD Ta:25℃	DIP S.W 50HZ: 50.041 HZ DIP S.W 60HZ: 59.958 HZ
5	WAVEFORM	True sine wave (THD<3%)	IP: 50VDC OP: FULL LOAD (1) Vo(min) (2) Vo(nor) (3) Vo(max) Ta:25℃	(1) 0.62% / Vo(min) /FULL LOAD (2) 0.64% / Vo(nor) /FULL LOAD (3) 0.63% / Vo(max) /FULL LOAD

CH3:O/P VAC CH4:O/P IAC

Fig1

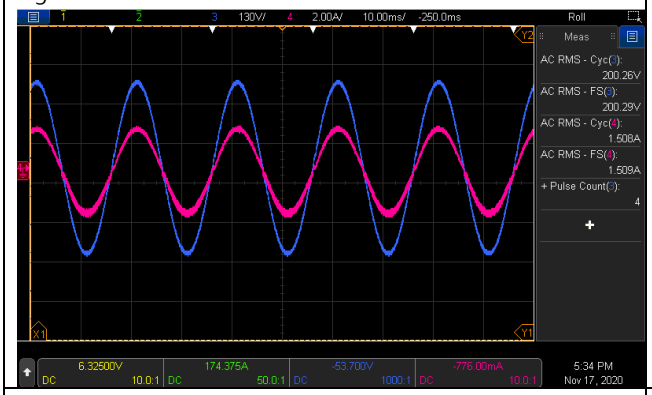

Fig2

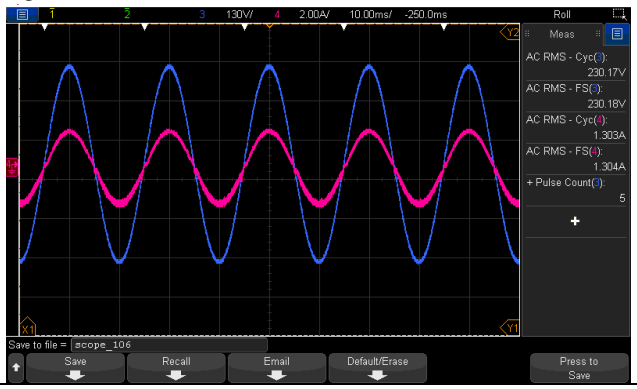

Fig3

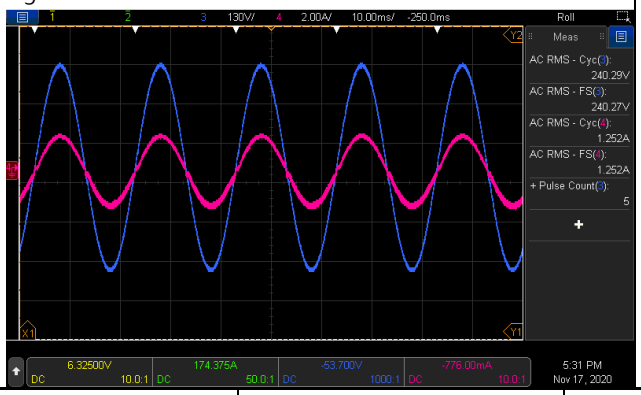

6	AC REGULATION	±3%	IP: 50VDC OP: FULL LOAD/NO LOAD Ta:25℃	-0.52 %
7	Overshoot /Undershoot	<±10%	IP: 48VDC OP: (1) full load turn on (2) no load turn on (3) full /no load change Ta:25℃	(1) -1.96 % (2) -1.1 % (3) -1.52 %
8	O/P voltage DC offset	Vin(nor)= 48 v · Vo<200mv · no load :80.2 mV / full load: 96 mV		

9	LED STATUS	● Statas test

LED	Statas	RESULT
Green	Inverter OK	OK
Orange	Remote off Saving mode	OK
Red	Abnormal Status (See SPEC)	OK

● Battery test

LED	Battery RANGE	RESULT
Green	50~62Vdc±1 v	50.14vdc~ 62.01 vdc
Orange	44~ 50Vdc ±1v	44.415Vdc ~ 49.2Vdc
Red	<44 Vdc ±1v >62 Vdc ±1v	<44.01vdc > 62.12 vdc

● Load test

LED	LOAD RANGE	RESULT
Green	Min. load ~ 40%±5% LOAD	Min. load ~ 38.7%
Orange	40%±5% ~ 80%±5% LOAD	39.5% ~ 77.3%
Red	≧ 80%±5% LOAD	≧ 81%

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	VOLTAGE RANGE (TYP)	40VDC~66VDC	IP: TESTING OP:NO LOAD/FULL LOAD Ta:25℃	40.2 VDC~ 65.9 VDC/NO LOAD 40.5 VDC~ 65.9 VDC/FULL LOAD
			I/P: LOW-LINE=42V HIGH-LINE=65V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON:30Sec OFF:30Sec 10MIN (POWER ON/OFF NO DAMAGE) I/P: 48V O/P:FULL LOAD ON:30ec OFF:30ec 12Hr (POWER ON/OFF NO DAMAGE)	Test: OK

2	DC CURRENT (TYP)	8A	IP: 48VDC OP:FULL LOAD Ta:25℃	6.66 A
3	NO LOAD DISSPATION (Typ.)	NON-Saving Mode=12W	IP: 48VDC OP:NO LOAD Ta:25℃	9.28 W
		SAVING MODE (1) Po： Default disable, auto detect AC output load ≦ 10W will be changed to saving mode (2) Pi ： ≦1.5 W	IP: 48VDC OP: TESTING LOAD Ta:25℃	NORMAL TO SAVING MODE: ≦ 17 W
			IP: 48VDC OP: TESTING LOAD Ta:25℃	0.926 W
4	OFF MODE CURRENT DRAW (Typ.)	≦ 1mA	IP: 48VDC OP: Sw off Ta:25℃	0.76 mA
5	EFFICIENCY(TYP)	300W/ 93%	IP:50VDC OP: Po= 300W 230V/50HZ (factory setting) Ta:25℃	93.9 %

PROTECTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	BAT LOW ALARM	44V±1VDC	IP: TESTING OP:FULL LOAD SW:ON Ta:25℃	43.9 V
2	BAT LOW SHUT DOWN	40V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	40 V
3	BAT LOW RESTART	50V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	49.97 V
4	BAT HIGH ALARM	62V±1VDC	IP: TESTING OP:FULL LOAD SW:ON Ta:25℃	62.1 V
5	BAT HIGH SHUT DOWN	66V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	66.10 V
6	BAT HIGH RESTART	60V±1VDC	IP: TESTING OP: FULL LOAD SW:ON Ta:25℃	60.03 V

7	OVER TEMPERATURE	Shut down o/p voltage: re-power on	IP: HI LINE/LOW-LINE OP: FULL LOAD SW:ON Ta:25℃	Shut down o/p voltage, re-power on to recover LED DISPLAY: OK
8	OUTPUT SHORT	Shut down o/p voltage: re-power on	IP: 48VDC O/P: FULL LOAD SW:ON Ta:25℃	Shut down o/p voltage, re-power on to recover LED DISPLAY: OK (1).TEST: OK
9	OVER LOAD (typ.)	105%~115%LOAD 180sec 115%~150%LOAD 10 sec Shut down o/p voltage, re-power on to recover	IP: 48VDC OP: TESTING SW:ON Ta:25℃	(1). 105 % ~ 112.6 % 180.08 sec (2). 117% ~145 % 10.07 sec Shut down o/p voltage, re-power on to recover

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	REMOTE CONTROL	Power ON-OFF remote control by front panel dry contact connector (by RELAY) Open : Normal work Short : Remote off	IP: 48VDC OP: FULL LOAD Ta:25℃	Open : Normal work Short : Remote off TEST: OK

APPLICATION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	LAMP	LAMP: 209 W · turn on OK LAMP: 314 W · turn on OK LAMP: 400 W · turn on OK	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: OK	
2	INDUCTION MOTOR	0.12 HP	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: OK	
3	SWITCHING POWER SUPPLY	WITH PFC: EPP-500-48 · O/P= 303 W	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: OK	
		NO PFC: LRS-350-36 · O/P= 86 W	1. Vin=HIGH LINE 2. O/P=230V/50Hz TEST: OK	

COMPONENT WEAFORM TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC TO DC Power Transistor (D to S) or (C to E) Peak Voltage	Q102 Rated : 200V /40A	I/P: high line O/P:V(max)/Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	(1) 155V (2) 153V (3) 165V (4) 151V (5) 151V

2	DC TO DC Diode Peak Voltage	D 105 Rated : 600V/ 10A	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	(1) 546V (2) 550V (3) 558V (4) 570V (5) 570V
3	DC BUS Capacitor Voltage	C118/C119 Rated : 390 u/ 265V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	C118 C119 (1) 247V (1) 251 (2) 247V (2) 251 (3) 247V (3) 243V (4) 243V (4) 255V (5) 247V (5) 251V
4	DC TO AC Power Transistor (D to S) or (C to E) Peak Voltage	Q 200 Rated : 650V / 15 A	I/P: high line O/P:V(max) /Freq 60HZ VDS: O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	(1) 548V (2) 620V (3) 576V (4) 548V (5) 544 V
5	AUX PWM MOS	Q504 Rated : 18 A/ 200 V Q105 Rated : 40 A/ 200 V	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	Q504 (1) 134.5V (2) 133.7V (3) 134.5V (4) 134.5V (5) 133.7V Q105 (1) 143.2V (2) 142.4 (3) 143.2V (4) 143.2V (5) 142.6V
6	Control IC Voltage Test	MCU IC U303 Rated 2.4 V~ 3.6 V AUX IC U501 Rated 8.2V~30V CHARGE IC U101 Rated -0.3V~20V Gate Driver IC U200 Rated	I/P: high line O/P:V(max) /Freq 60HZ O/P: (1)Full Load Turn On (2) Output Short (3)O.L.P(200%) Turn On (4) NO LOAD Turn On (5) Saving mode Ta:25℃	U303 (1) 3.32V (2) 3.32V (3) 3.34V (4) 3.32V (5) 3.32V U501 (1) 11.7V (2) 11.7V

		-0.3V~20V		(3) 11.7V (4) 11.6V (5) 11.7V U101 (1) 12.40V (2) 12.40V (3) 12.40V (4) 12.40V (5) 12.40V U200 (1) 5.08V (2) 5.08V (3) 5.08V (4) 5.08V (5) 5.08V

SAFETY &EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	BAT I/P-ACO/P: 3 KVAC/min AC O/P-FG: 1.5 KVAC/min	BATI/P-ACO/P 3.6 KVAC/min AC O/P-FG:1.8 KVAC/min Ta:25℃	BAT I/P-ACO/P: 2.931 mA AC O/P-FG: 6.19 mA NO DAMAGE
2	GROUNDING CONTINUITY	IEC62368 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta:25℃	4mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RADIATION	EN55032 CLASS A	I/P:48 VDC O/P: :FULL/50% LOAD Ta:25℃	CLASS A
2	E.S.D	EN61000-4-2 AIR：8KV / Contact：4KV	I/P: 48VDC O/P:FULL LOAD Ta:25℃	■CRITERIA A □ CRITERIA B
3	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

Reliability Test

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL：NTS-300-224 1. ROOM AMBIENT BURN-IN：2 HRS I/P： 50VDC O/P： FULL LOAD Ta= 25.9 ℃ 2. HIGH AMBIENT BURN-IN： 2 HRS I/P： 50VDC O/P： FULL LOAD Ta= 40.5 ℃		
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P： 25VDC O/P： 100%LOAD Ta= -25 ℃	TEST：OK

NO	Position	ROOM AMBIENT Ta=25.9 ℃	HIGH AMBIENT Ta= 40.5 ℃
1	C100	58.0℃	73.6℃
2	C101	60.3℃	76.0℃
3	Q101	54.6℃	69.8℃
4	Q103	54.7℃	70.0℃
5	RT300	55.9℃	71.2℃
6	T101	73.5℃	89.7℃
7	U303	62.3℃	76.7℃
8	L100	60.3℃	76.3℃
9	D107	57.3℃	72.3℃
10	D108	57.8℃	72.7℃
11	C112	61.3℃	76.8℃
12	C119	62.2℃	77.8℃
13	Q200	61.8℃	77.0℃
14	C118	64.1℃	79.5℃
15	L201	67.2℃	82.0℃
16	C219	62.5℃	78.0℃
17	Q203	60.0℃	74.9℃
18	L200	69.9℃	86.1℃
19	TSW1	65.2℃	81.0℃
20	ZR200	58.2℃	73.6℃
21	T100	59.2℃	74.2℃
22	T501	67.7℃	82.8℃
23	Q105	60.9℃	75.6℃
24	Q501	72.6℃	87.9℃
25	U501	81.3℃	96.4℃
26	U101	65.7℃	80.6℃
27	Q504	74.4℃	89.1℃
28	C114	59.0℃	73.9℃
29	U500	66.2℃	81.2℃
30	U201	63.5℃	78.2℃
31	U100	56.3℃	71.1℃

3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 40 ℃ NO DAMAGE	I/P：32.5VDC O/P：FULL LOAD Ta= 40 ℃ HUMIDITY= 95 %R.H	TEST：OK
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature： -45℃~ +90℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：5 CYCLE 5. Input/Output condition： STATIC		TEST：OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature： -25℃~ +45℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：10 CYCLE 5. Input/Output condition： 24VDC/Full Load		TEST：OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform： Sine Wave (2) Frequency：10~500Hz (3) Sweep Time：10min/sweep cycle (4) Acceleration：4G (5) Test Time：60min in each axis (X.Y.Z) (6) Ta：25℃		TEST：OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P： 25VDC O/P：FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P： 25VDC O/P：FULL LOAD Ta= 40 ℃ LIFE TIME		(1) 376133.5HRS (2) 119851.2HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 845.6K hrs min. Telcordia SR-332 (Bellcore) ; 85.3K hrs min. MIL-HDBK-217F (25℃)		
11	Ongoing Reliability Test	I/P：25VDC O/P：80% LOAD TA=50℃ Demonstration Mean Time Between Failure : 30,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

2018.4.30 GP-A50-F010