Test Report: XDR-960-24

960W AC/DC High-End Ultra Slim Industrial DIN Rail Power

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 24V~29V	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25℃	22.716V~30.345V/277VAC 22.715V~30.344V/230VAC 22.716V~30.344V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 85VAC~305VAC O/P:FULL~MIN. LOAD Ta:25℃	V1: -0.0915% ~ 0.0915%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25℃	V1: -0.0042% ~ 0.0292%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: -0.0915% ~ 0.0915%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD/ PEAK LOAD Ta:25℃	2.1%
6	RIPPLE & NOISE (Max)	V1: 100mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25℃	40mVp-p / high frequency 61mVp-p / low frequency
	high frequency : 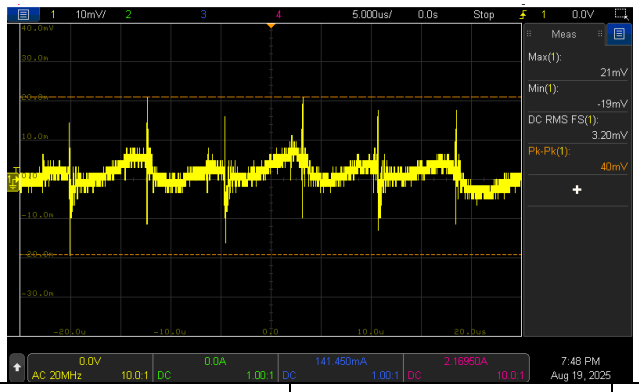		low frequency : 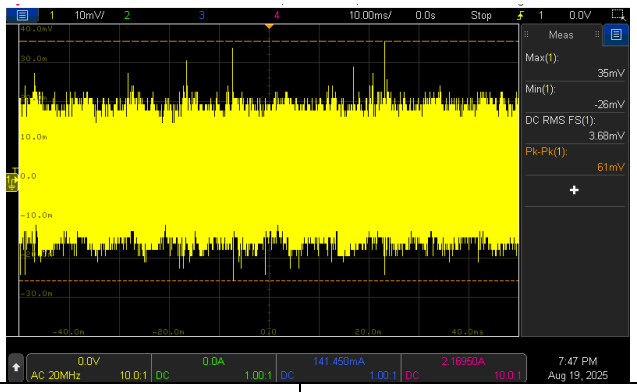	
7	SET UP TIME(Max)	277VAC/1500ms 230VAC/1500ms 115VAC/1500ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25℃	277VAC/ 1013ms 230VAC/ 1016.6ms 115VAC/ 1067.8ms
	INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage	

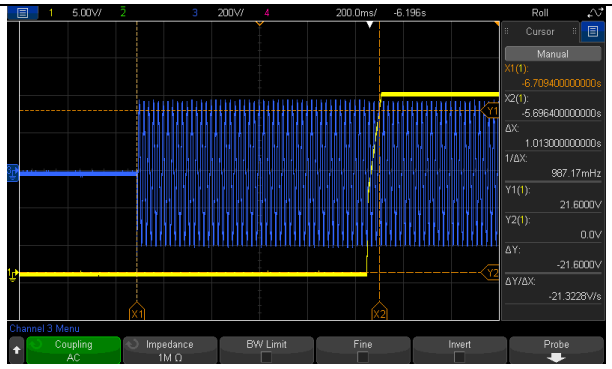

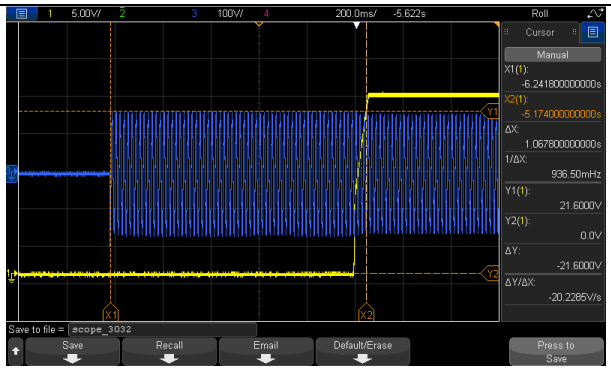

INPUT=230VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH3: AC Input Voltage

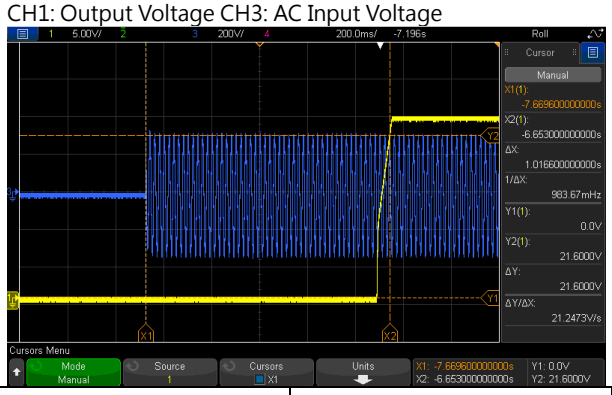

8	RISE TIME (Max)	277VAC/100ms 230VAC/100ms 115VAC/100ms	I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	277VAC/ 48.72ms 230VAC/ 49.38ms 115VAC/ 48.59ms

INPUT=277VAC/50HZ @ FULL LOAD

CH1: Output Voltage

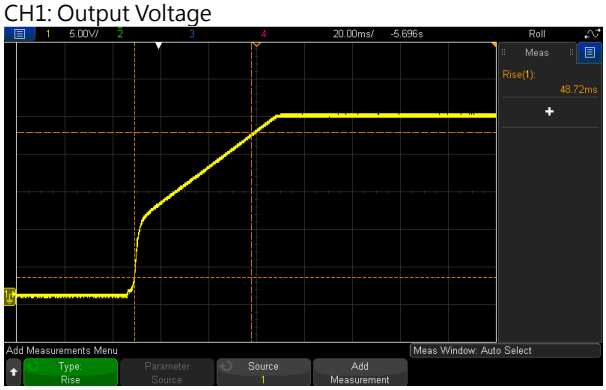

INPUT=115VAC/60HZ @ FULL LOAD

CH1: Output Voltage

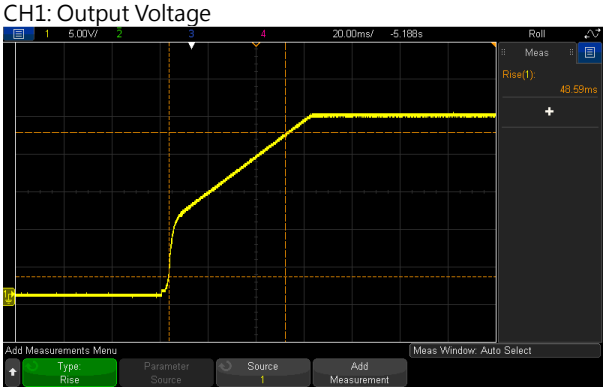

INPUT=230VAC/50HZ @ FULL LOAD

CH1: Output Voltage

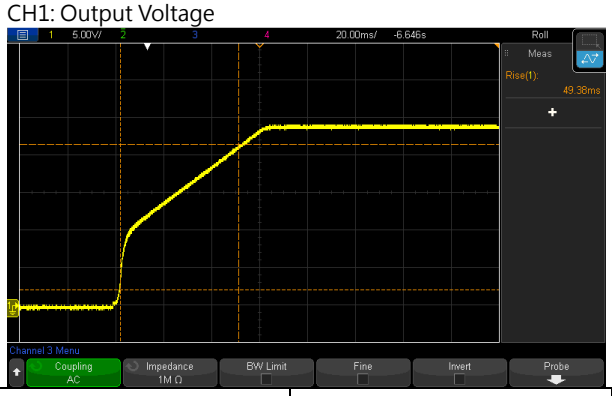

9	HOLD UP TIME (Typ.)	277VAC/20ms	I/P： 230 VAC	277VAC/ 33.8ms

		230VAC/ 20ms 115VAC/ 20ms	I/P： 115 VAC O/P：FULL LOAD Ta：25℃	230VAC/ 34.6ms 115VAC/ 35ms
	INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 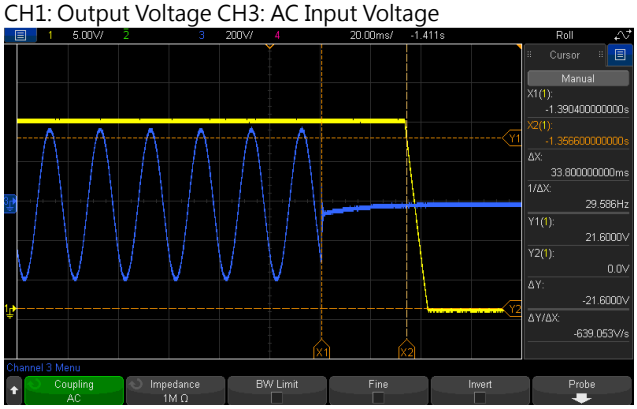 INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 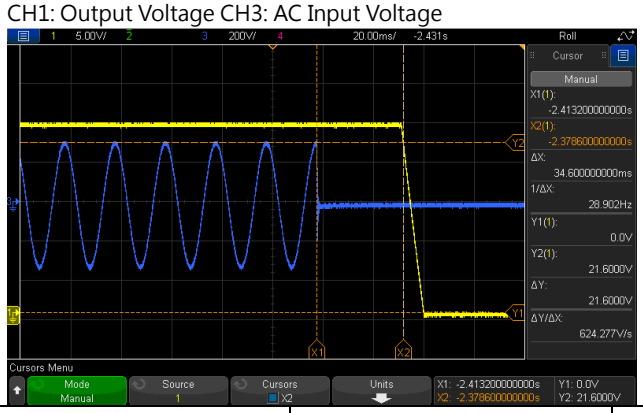		INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage 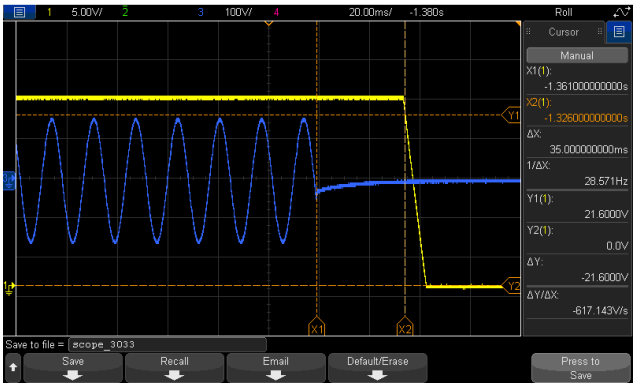	
10	DYNAMIC LOAD	V1: 2400mVp-p	I/P: 230VAC O/P: (1) FULL/ MIN LOAD 50%DUTY / 120HZ (2) FULL/ MIN LOAD 50%DUTY / 1KHZ Ta:25℃	1130mVp-p 1010mVp-p
	FULL / MIN LOAD 50%DUTY / 120HZ 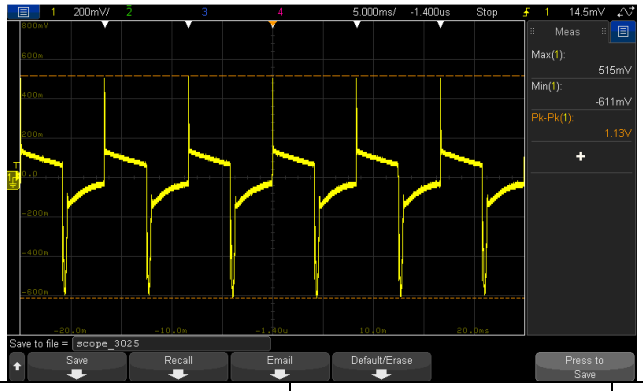		FULL / MIN LOAD 50%DUTY / 1KHZ 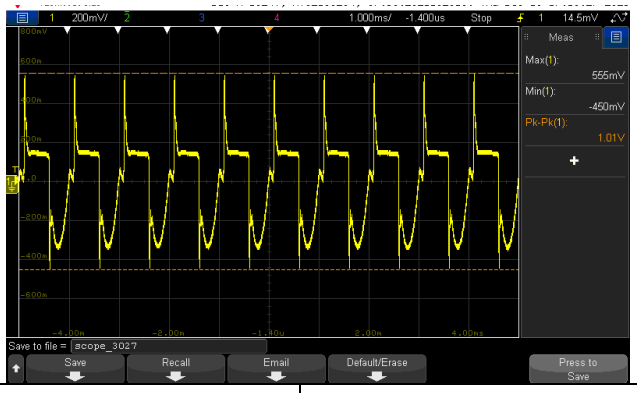	
11	TRANSIENT RECOVERY TIME	V1: 2400mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	510mVp-p

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~305VAC 80VDC~ 431VDC   	(1) I/P: TESTING O/P: FULL / 85% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 85% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 85% LOAD Ta:25℃	(1) 81.8V~305V/ FULL LOAD 81V~305V/ 85% LOAD (2) 75.4Vdc~431Vdc/FULL LOAD 74.9Vdc~431Vdc/85% LOAD (3) 75.4Vdc~431Vdc/FULL LOAD 74.7Vdc~431Vdc/85% LOAD
			I/P: HIGH-LINE+10V=315V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST：OK
		Derating 50% Load @80VDC	I/P: 80VDC O/P: 50% Load	TEST：OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC~ 305VAC O/P:FULL~MIN LOAD Ta:25℃	TEST：OK
3	INPUT CURRENT (Typ.)	277V/ 4.2A 230V/5A 115V/ 10A	I/P： 277 VAC I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	I =3.8775A/ 277VAC I =4.4945A/ 230VAC I =9.2522A/ 115VAC
4	LEAKAGE CURRENT	＜3.5mA@240Vac ＜4.5mA@277Vac	I/P：240VAC/60HZ I/P：277VAC/60HZ O/P：Min LOAD Ta：25℃	1.4mA@240Vac 1.596mA@277Vac
5	NO LOAD CONSUMPTION	Remote Power OFF: 1.5W@115Vac & 230Vac& 277Vac Remote Power ON: 6.7W@115Vac 4.5W@277 Vac & 230Vac	I/P：115VAC I/P：230VAC O/P：NO LOAD Ta：25℃	TEST： Remote Power OFF / Remote Power ON 115VAC: 0.866W / 5.627W 230VAC: 1.089W / 3.145W 277VAC: 1.235W / 3.059W
6	POWER FACTOR (Typ.)	0.90/ 277VAC 0.95/ 230VAC 0.98/115VAC	I/P： 277 VAC I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	PF=0.9369/277VAC PF=0.9702/230VAC PF=0.9967/115VAC
	P.F vs LOAD			

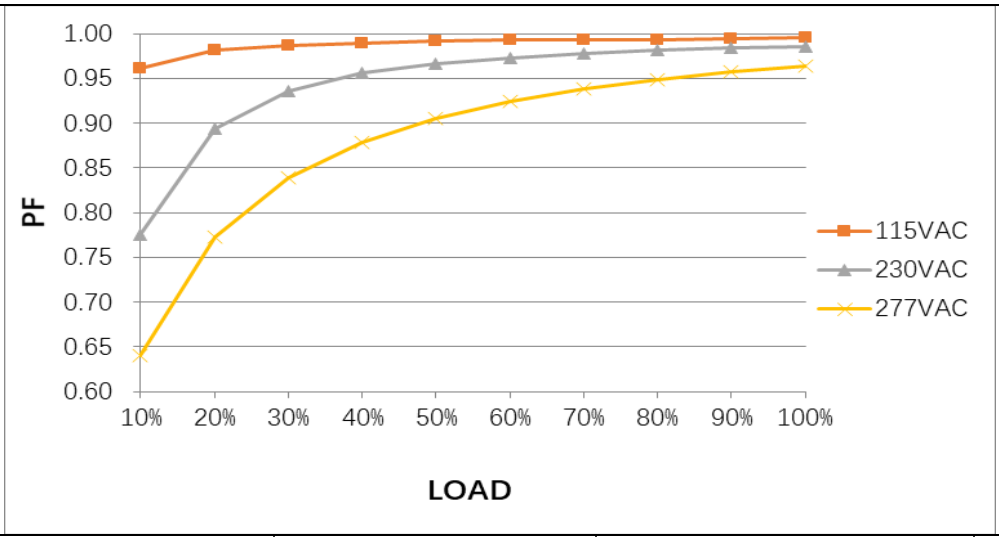

7	EFFICIENCY(Typ.)	95%	I/P:230 VAC O/P:FULL LOAD Ta:25℃	95.46%

EFFICIENCY vs LOAD

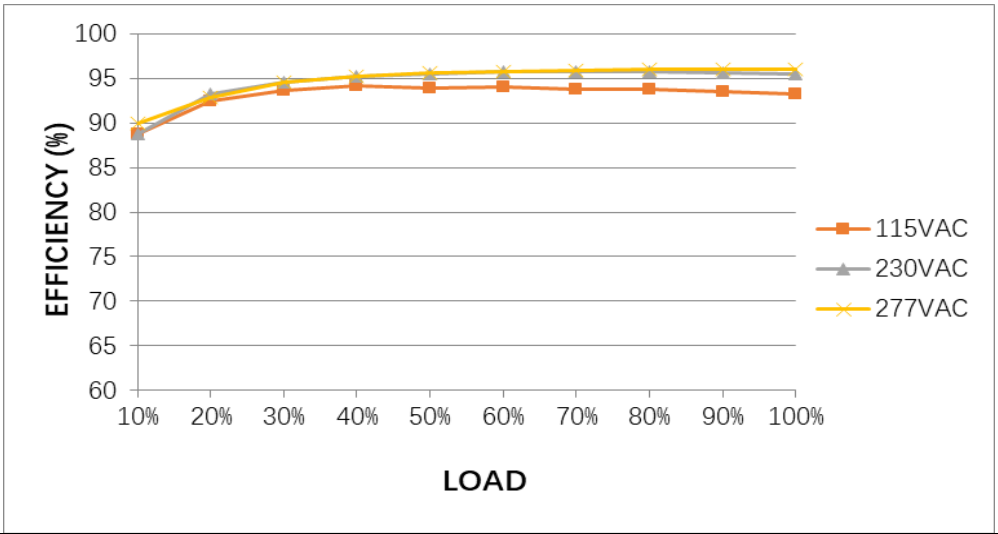

8	INRUSH CURRENT(Typ.)	277V/15A 230V/10A 115V/23A COLD START	I/P： 277 VAC I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	I =10.9A/ 277VAC I =9.0A/ 230VAC I =4.31A/ 115VAC T50=2670us/230V

INPUT=277VAC/50HZ @ FULL LOAD
CH3: AC Input Voltage CH4: Input current

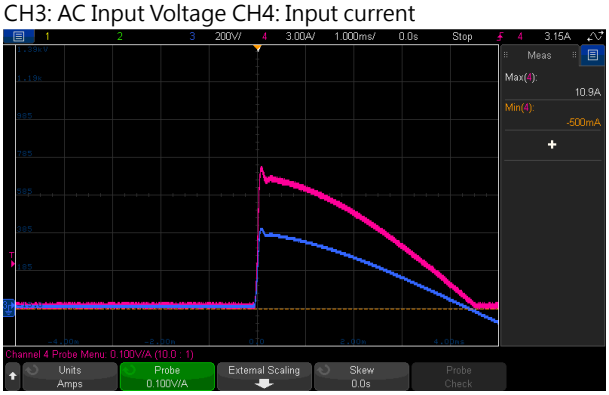

INPUT=230VAC/50HZ @ FULL LOAD
CH3: AC Input Voltage CH4: Input current

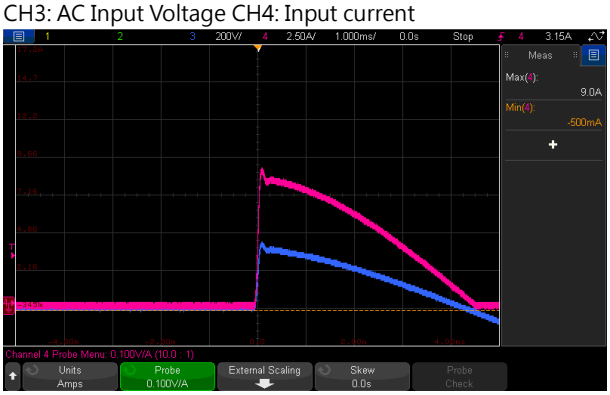

INPUT=115VAC/ 60HZ @ FULL LOAD

CH3: AC Input Voltage CH4: Input current

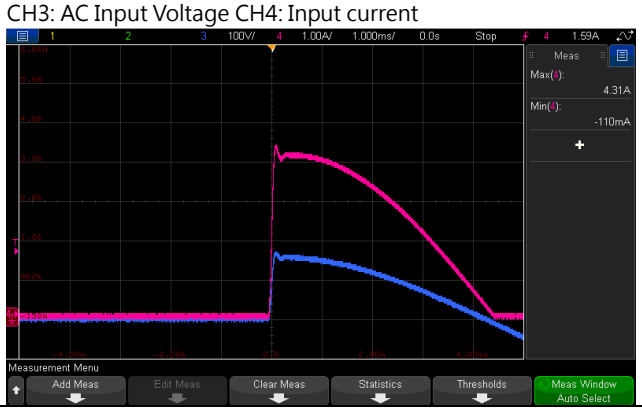

T50@230VAC：

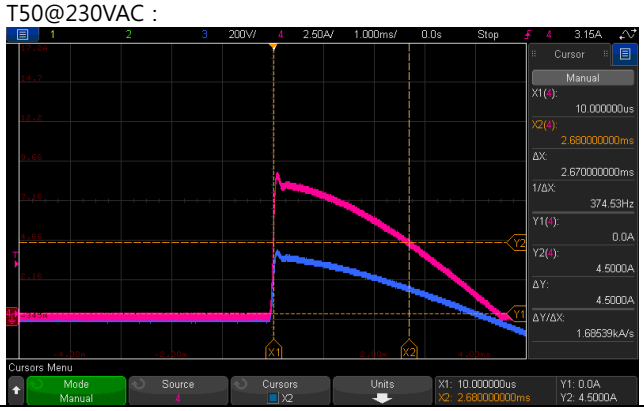

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when Vo=30%~100% Hiccup mode when Vo<30% rated voltage	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P:TESTING Ta:25℃	130.55%/305VAC 130.175%/230VAC 130.7%/100VAC Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when Vo=30%~100%； Hiccup mode when Vo<30% rated voltage
2	OVER VOLTAGE PROTECTION	30V~34V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 305VAC I/P: 85VAC O/P:MIN LOAD Ta:25℃	31.9V/ 305VAC 31.9V/ 85VAC PROTECTION TYPE： Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	O.T.P. Active Protection type： Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode when Vo<30% rated voltage	I/P: 305VAC I/P: 85VAC O/P:FULL LOAD	NO DAMAGE PROTECTION TYPE： Hiccup mode when Vo<30% rated voltage
5	Protection against Inverse Voltages from the Load	Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load	I/P: 230VAC O/P:TESTING Ta:25℃	TEST： OK

				

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	DC OK CONTACT RATINGS	30VDC/1A，30VAC/0.5A RESISTIVE LOAD	I/P:230VAC O/P:FULL LOAD Ta:25℃	TEST: OK _
2	REMOTE CONTROL	Power ON: Pin9 and Pin10 Short or keep 4~5Vdc Power OFF: Pin9 and Pin10 Open or keep<0.5Vdc	I/P:230VAC O/P:FULL LOAD Ta:25℃	TEST: OK
3	PULSE CURRENT CAPABLILTY	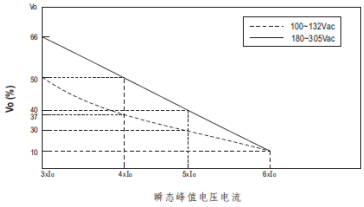 负载 / 100~132Vac Vo(%) / 180~305Vac Vo(%) / 时间 (Max.) 3xIo / 50 / 66 / 100ms 4xIo / 37 / 50 / 70ms 5xIo / 30 / 40 / 40ms 6xIo / 10 / 10 / 15ms	I/P:200VAC/100VAC O/P: TESTING Ta:25℃	**180VAC：** Load / Iout_Time(ms) 3xIo / 104.8 4xIo / 72.4 5xIo / 41.6 6xIo / 25.9 **100VAC：** Load / Iout_Time(ms) 3xIo / 103.8 4xIo / 71.8 5xIo / 41.6 6xIo / 26
4	PULSE CURRENT CAPABLILTY	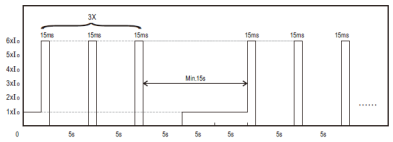	I/P:230VAC O/P:TESTING Ta:25℃	TEST：OK
5	LED Status Indictors	**LED：** Description / Output of alarm Restore Factory Settings / Green : 3 Blink/Pause DC OK / Green DC Fail / Red Overload (115Vac: >150% rated current) (230Vac: >200% rated current) / Red : 1 Blink/Pause Over voltage / Red : 2 Blink/Pause Over temperature / Red : 3 Blink/Pause Against Inverse Voltages From The Load / Red : 4 Blink/Pause High Ambient Temperature Warning / Red : Blink Others (Note) / Red : 5 Blink/Pause Note: Others include protection status AC U/VP、Internal Communication error and E8PROM error.	I/P:230VA0C O/P:FULL LOAD Ta:25℃	TEST：OK

6	PARALLEL	Up to 3840W (3+1), please refer to Function Manual for more details	I/P: TESTING O/P: TESTING LOAD Ta:25℃	TEST : OK
7	PEAK Power	I/P: 100/200VAC O/P: 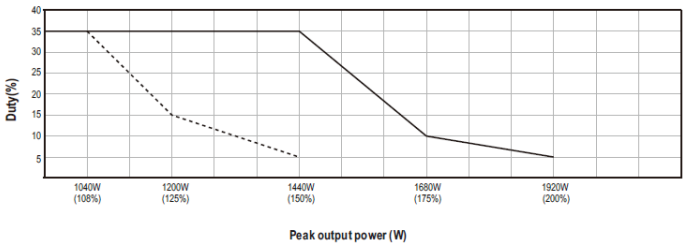 ------100VAC ———200VAC		TEST : OK

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT	
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5/Q6 : Rated: 90A/650V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25℃	Q5 VDS: (1) 563V (2) 555V (3) 567V (4) 563V (5) 563V (6) 567V (7) 559V (8) 559V	Q6 VDS: (1) 575V (2) 571V (3) 575V (4) 575V (5) 575V (6) 575V (7) 567V (8) 571V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1/Q2 : Rated: 68A/600V	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25℃	Q1 VDS: (1) 495V (2) 487V (3) 503V (4) 483V (5) 487V (6) 491V (7) 495V (8) 503V	Q2 VDS: (1) 495V (2) 451V (3) 475V (4) 459V (5) 463V (6) 459V (7) 483V (8) 479V

3	P.F.C DIODE	D8/D9 : Rated: 10A/650V	I/P: High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25℃	D8 : (1) 537V (2) 541V (3) 541V (4) 541V (5) 545V	D9 : (1) 501V (2) 501V (3) 501V (4) 501V (5) 509V
4	Diode Peak Voltage	Q100 / Q104 : Rated: 16A/100V	AC ON/OFF I/P: High-Line +3V =308 V VO=Vomax O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load VO=Vonormal O/P: (1) Full Load Ta:25℃	Q100: VO=Vomax VDS: (1) 72.5V (2) 72.5V (3) 73.1V (4) 73.7V (5) 73.1V (6) 73.1V (7) 73.7V (8) 69.5V (9) 74.3V VO=Vonormal (1) 67.1V	Q104: VO=Vomax VDS: (1) 74.3V (2) 71.9V (3) 73.1V (4) 73.1V (5) 72.5V (6) 74.3V (7) 71.3V (8) 76.7V (9) 76.1V VO=Vonormal (1) 67.7V
5	AUX Transistor (D to S) or (C to E) Peak Voltage	U2 : Rated: 725V/654mA	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25℃	VDS: (1) 554V (2) 550V (3) 554V (4) 554V (5) 558V (6) 558V (7) 550V (8) 558V	
6	AUX Clamp Diode Peak Voltage	D 19: Rated: 1A/ 650V	AC ON/OFF I/P : High-Line +3V = 308V O/P : (1) Dynamic Load	(1) 572V (2) 518V	

			90%Duty/1KHz (2) Full load continue Ta：25℃		
7	AUX Diode Peak Voltage	D200： Rated： 1A/600V D22： Rated：3A/200V	AC ON/OFF I/P: High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load Ta:25℃	D200: (1) 113V (2) 112V (3) 113V (4) 113V (5) 113V (6) 114V (7) 114V (8) 111V (9) 113V	D22: (1) 142V (2) 142V (3) 139V (4) 135V (5) 139V (6) 136V (7) 136V (8) 133V (9) 142V
8	Input Capacitor Voltage	C5： Rated: 220μ /450V	I/P: High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue (5) Peak Load on/off (6) Peak Load continue Ta:25℃	(1) 445V (2) 441V (3) 433V (4) 433V (5) 433V (6) 441V	
9	Control IC Voltage Test	PWM IC U1： Rated：12.5V~ 27.9V PFC IC U5： Rated：11.6V~ 21V O/P IC U101： Rated：4.75V~38V IC U404： Rated：3V~36V AUX IC U2： Rated：5.65V~6.8V MCU IC U9： Rated：2V~3.6V Level：3.2835~3.3165V MCU IC U306: Rated：2.4V~ 3.6V Level：3.2835~3.3165V	AC ON/OFF I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (Low Line) Ta:25℃	U1: (1) 15.9V (2) 15.7V (3) 15.7V (4) 15.6V (5) 15.7V U5 (1) 15.1V (2) 15.1V (3) 15.1V (4) 15V (5) 14.9V U101 (1) 11.5V (2) 11.5V (3) 11.5V (4) 11.5V (5) 11.5V U404	U2 (1) 6.49V (2) 6.73V (3) 6.69V (4) 6.45V (5) 6.49V U9 (1) 3.33V (2) 3.32V (3) 3.33V (4) 3.32V (5) 3.32V U306 (1) 3.33V (2) 3.33V (3) 3.33V (4) 3.33V (5) 3.33V

				(1) 5.15V (2) 5.55V (3) 5.35V (4) 5.15V (5) 5.11V

■ SAFETY& E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 KVAC/min I/P-FG : 2 KVAC/min O/P-FG:1.5 KVAC/min O/P-DC OK: 0.5 KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min O/P-DC OK: 0.6 KVAC/min Ta:25℃	I/P-O/P: 6.1 mA I/P-FG: 7.05 mA O/P-FG: 4.54 mA O/P-DC OK: 0.006 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25℃	I/P-O/P: 50 GΩ I/P-FG: 50 GΩ O/P-FG: 50 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100mΩ	40A /2min Ta:25℃	12 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25℃	PASS
2	CONDUCTION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P： 230 VAC (50HZ) O/P：FULL/50% LOAD Ta：25℃	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P： 230 VAC (50HZ) O/P：FULL LOAD Ta：25℃	PASS Test by certified Lab
4	E.S.D	BS EN/EN 61000-4-2 AIR：15KV / Contact：8KV	I/P： 230 VAC/50HZ O/P：FULL LOAD Ta：25℃	CRITERIA A
5	E.F.T	BS EN/EN 61000-4-4 INPUT： 4KV	I/P： 230 VAC/50HZ O/P：FULL LOAD Ta：25℃	CRITERIA A

6	SURGE	BS E /EN 61000-4-5 L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : XDR-960-24 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=25.4℃ 2. HIGH AMBIENT BURN-IN : 2HRS		

NO	Position	ROOM AMBIENT Ta=25.4℃	HIGH AMBIENT Ta=59.7℃
1	C5	49.0℃	83.4℃
3	C8	50.5℃	85.0℃
4	RTH5	66.4℃	100.9℃
5	U5	59.6℃	94.5℃
6	U7	56.8℃	90.6℃
7	D10	64.8℃	98.1℃
8	C1	50.2℃	85.7℃
9	RTH3	62.5℃	95.9℃
10	D8	66.7℃	100.2℃
11	LF3	57.4℃	92.0℃
12	C53	50.9℃	84.6℃
13	C202	53.9℃	87.5℃
14	U307	59.7℃	93.9℃
15	C922	48.8℃	84.5℃
16	U11	66.3℃	100.5℃
17	U1	59.0℃	94.3℃
18	Q10	57.6℃	92.8℃
19	L6	46.9℃	81.4℃
20	ZNR1	51.1℃	86.0℃
21	LF1	54.1℃	89.1℃
22	C103	58.1℃	92.6℃
23	LF100	67.0℃	102.7℃
24	Q110	67.2℃	102.8℃
25	BD2	58.1℃	91.1℃
26	BD1	57.7℃	90.7℃
27	L7	64.1℃	98.0℃
28	T2	54.5℃	89.0℃
29	C52	56.3℃	90.9℃
30	Q5	61.5℃	96.3℃

I/P : 230VAC O/P : FULL LOAD Ta=59.7℃

NO	Position	ROOM AMBIENT Ta=25.4℃	HIGH AMBIENT Ta=59.7℃
31	Q6	59.6℃	94.7℃
32	T1coil	80.4℃	115.5℃
33	T1core	75.4℃	104.7℃
34	T3	57.6℃	93.1℃
35	Q1	63.2℃	97.8℃
36	T4	55.2℃	90.7℃
37	Q2	61.3℃	96.6℃
38	C11	54.5℃	89.7℃
39	L2	67.4℃	101.0℃
40	U9	52.8℃	84.2℃
41	L1	67.7℃	100.6℃
42	Q101	71.9℃	107.0℃
43	Q105	70.3℃	104.4℃
44	Q106	74.0℃	109.3℃
45	U102	72.1℃	106.7℃
46	Q102	72.7℃	107.5℃
47	U306	59.0℃	92.9℃
48	U400	58.2℃	92.0℃
49	J101	68.2℃	102.7℃
50	U401	64.3℃	98.5℃
51	D22	66.3℃	99.9℃
52	Q23	66.8℃	100.1℃
53	Q201	61.8℃	96.0℃
54	D17	59.4℃	94.6℃
55	R25	58.2℃	92.6℃
56	C108	66.3℃	100.4℃
57	C105	60.3℃	95.0℃
58	Q111	66.0℃	101.9℃
59	RG6	62.0℃	96.0℃
60	C107	66.6℃	101.1℃
61	D9	64.3℃	98.1℃
62	U404	55.2℃	89.7℃
63	L5	52.1℃	87.5℃

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 125%LOAD Ta : 25℃	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 80%/100 %LOAD Ta= -45℃/-35℃	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃/95 %R.H NO DAMAGE	I/P : 315VAC O/P : FULL LOAD Ta= 60℃ HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/℃(0~60℃)	I/P : 230 VAC O/P : FULL LOAD	± 0.008%/℃(0~60℃)

6	STORAGE TEMPERATURE TEST	-40~85℃	1. Thermal shock Temperature： -45℃~ +90℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：10 CYCLE 5. Input/Output condition： STATIC
7	THERMAL SHOCK TEST	-30~60℃	1. Thermal shock Temperature： -35℃~ +65℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：16 CYCLE 5. Input/Output condition： 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform： Sine Wave (2) Frequency：10~500Hz (3) Sweep Time：10min/sweep cycle (4) Acceleration：3G (5) Test Time：180min in each axis (X.Y.Z) (6) Ta：25℃
9	CAPACITOR LIFE CYCLE	SUPPOSE C109 IS THE MOST CRITICAL COMPONENT (1) I/P： 230VAC O/P：FULL LOAD Ta= 25℃ LIFE TIME (2) I/P： 230VAC O/P：FULL LOAD Ta= 60℃ LIFE TIME (3) I/P： 230VAC O/P：75% LOAD Ta= 60℃ LIFE TIME (4) I/P： 230VAC O/P：50% LOAD Ta= 60℃ LIFE TIME	(1) 395169 HRS (2) 34447 HRS (3) 71279 HRS (4) 137268 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 819.6K hrs min. Telcordia SR-332 (Bellcore) ; 113.3K hrs min. MIL-HDBK-217F (25℃)	
11	Ongoing Reliability Test	I/P：230VAC O/P：FULL LOAD TA=50℃ Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Hanxr	Liutt	Wangzd

2020.10.1 TAG-QA-009